



# 425 LXF


w/ SEAKEEPER



### PERFORMANCE DATA (Twin 600s)

| RPM  | MPH  | GPH   | MPG |
|------|------|-------|-----|
| 700  | 3.0  | 2.5   | 1.2 |
| 1000 | 4.6  | 3.7   | 1.2 |
| 1500 | 6.9  | 6.9   | 1.0 |
| 2000 | 9.0  | 10.9  | 0.8 |
| 2500 | 10.1 | 16.6  | 0.6 |
| 3000 | 20.0 | 31.0  | 0.6 |
| 3500 | 26.0 | 39.1  | 0.7 |
| 4000 | 34.3 | 45.6  | 0.8 |
| 4500 | 41.3 | 53.2  | 0.8 |
| 5000 | 46.5 | 60.9  | 0.8 |
| 5500 | 52.2 | 83.1  | 0.6 |
| 6000 | 57.0 | 101.9 | 0.6 |
| 6410 | 61.9 | 101.0 | 0.6 |

**Best Cruise MPG**

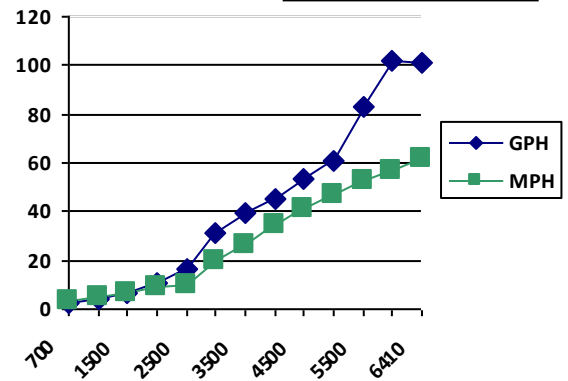

### 425 LXF SPECIFICATIONS

|                                 |            |
|---------------------------------|------------|
| Length                          | 42' 2"     |
| Beam                            | 13' 1"     |
| Dry Weight w/o engines (approx) | 16,800 lbs |
| Fuel Capacity                   | 500 gal    |
| Max HP                          | 1,600 HP   |

|                                  |              |
|----------------------------------|--------------|
| Top Speed (MPH@RPM) =            | 61.9 @ 6410  |
| 0 – 20 MPH =                     | 6.1 seconds  |
| 0 – 30 MPH =                     | 9.76 seconds |
| Best Fuel Efficiency (MPG@RPM) = | 0.8 @ 4000   |

### MERCURY POWER

|                    |                     |
|--------------------|---------------------|
| Outboard Models    | Twin V12 Verado 600 |
| Verado 12 SS Props | 29p/29p             |

### TEST CONDITIONS

|                |          |
|----------------|----------|
| Test Personnel | 2        |
| Air Temp (°F)  | 70°      |
| Test Date      | 01.20.21 |

*\*\* Test weight includes half tank of fuel, Seakeeper Gyro Stabilizer, batteries, safety & test equip.*

*Information in this report is approximate and subject to many variables. Use only as a guideline.*

